

# L550-xxx White + Dual FAA

## Medium intensity LED obstruction light

Obstruction light for day and night time marking of structures that present a hazard to aviation. White flashing in day and White flashing or Red flashing / steady in night mode. Incorporates the benefits of advanced LED, optical and system control technologies to meet the most demanding applications.



### KEY FEATURES

- Five year warranty
- Housing based on 30 years of experience offshore product design experience
- Lightweight and easy to install
- Extremely low wind factor
- Integrated design with built-in photocell and monitoring – no additional power supply enclosures required
- No maintenance required over service life
- Orga optical design produces highly accurate and uniform narrow light beam
- Optional integrated GPS based flash synchronisation between lights. UTC 0.0.0
- Extremely low power consumption
- Constant power draw – eliminates high peak power demands especially important when running from UPS
- 15 year field proven power supply technology
- Long life power supply to match LED life, does not use electrolytic capacitors
- Made in The Netherlands

### STANDARDS/CERTIFICATION

- Certified to United States Federal Aviation Administration AC150/5345-43G, December 2012, including Engineering Brief 67D
- Various national approvals available upon request

### PERFORMANCE CHARACTERISTICS

- Horizontal beam pattern: 360°
- Flashing: see table
- Effective intensity: see table
- Vertical beam pattern: 3° minimum

### ELECTRICAL CHARACTERISTICS

- Operating voltage: 120-240 Vac nominal 50-60 Hz
- Power factor: >0.9 in day intensity mode
- Power consumption: See table
- Overvoltage protection: Class III according to IEC61643-1

### PHYSICAL CHARACTERISTICS

- Dimensions: L x W x H: see drawing
- Weight: 12 kg
- Design degree of protection: IP65
- Operating temperature range: -40 °C/+55°C
- Shipping information: 550 x 550 x400 mm; approx. 16 kg
- Supplied with pre-mounted Orga cable for easy installation and high reliability ready for use
- Cable bending radius static: 7x cable diameter
- Outer cable diameter: Ø12.5 +/- 0.5 mm
- Cable weight: 260 g/m
- Level indicators for correct mounting

### SYSTEM DESIGN, CONTROL AND MONITORING

- Use as a stand-alone light, or in a multiple light system with an Orga CIP controller
- Optional Orga CIP controller facilities provides control interfaces for:
  - “smart switch” aircraft detection input
  - Visibility condition variable intensity input
  - Remote photocell control input/override
  - Visibility condition variable intensity input; intensity steps 30% and 10%



# L550-xxx White + Dual FAA

Medium intensity LED obstruction light


Product	Additional information						
Type	Light performance			Power consumption (W) @ 20 °C			Standard
	Day	Tw	Night	Day	Tw	Night	
L550-865	20.000 cd 40 fpm White	20.000 cd 40 fpm White	2000 cd 40 fpm White	36 W	36 W	7 W	FAA
L550-865-G	20.000 cd 40 fpm White	20.000 cd 40 fpm White	2000 cd 40 fpm White	37 W	37 W	9 W	FAA
L550-865-IR-G	20.000 cd 40 fpm White	20.000 cd 40 fpm White	2000 cd 40 fpm White +IR	37 W	37 W	9 W	FAA
L550-864/865	20.000 cd 40 fpm White	20.000 cd 40 fpm White	2000 cd 20 fpm Red	36 W	36 W	17 W	FAA
L550-864/865-G	20.000 cd 40 fpm White	20.000 cd 40 fpm White	2000 cd 20 fpm Red	36 W	36 W	17 W	FAA
L550-864/865D	20.000 cd 40 fpm White	20.000 cd 40 fpm White	2000 cd 20 fpm Red	36 W	36 W	17 W	FAA
L550-864/865-30/40 L550-864/865-30/40-G	20.000 cd 40 fpm White	20.000 cd 40 fpm White	2000 cd 30 fpm Red	36 W	36 W	17 W	FAA
L550-864/865-30/40-IR L550-864/865-30/40-IR-G	20.000 cd 40 fpm White	20.000 cd 40 fpm White	2000 cd 30 fpm Red and IR	36 W	36 W	17 W	FAA
L550-864/865-40-40	20.000 cd 40 fpm White	20.000 cd 40 fpm White	2000 cd 40 fpm Red	36 W	36 W	18 W	FAA
L550-864/865-40-40-G	20.000 cd 40 fpm White	20.000 cd 40 fpm White	2000 cd 40 fpm Red	36 W	36 W	18 W	FAA
L550-865-40-54-G	20.000 cd 40 fpm White	20.000cd 40fpm White	2000cd 40fpm White	44W	44W	21W	FAA
L550-865-ISC-G	20.000 cd 40 fpm White	20.000 cd 40 fpm White	4000 cd 40 fpm White	37 W	37 W	11 W	FAA




# L550-xxx White + Dual FAA

Medium intensity LED obstruction light

FRONT VIEW

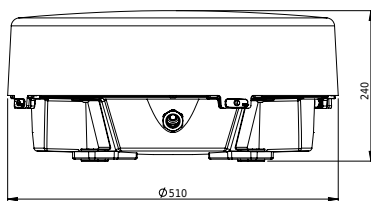

LEFT VIEW



BOTTOM VIEW

