

L550-XXX-SE-G WHITE + RED + INFRARED

Medium intensity obstruction light

Obstacle light for day and night time marking of structures that present a hazard to aviation. Optimized for use in Offshore environments.

White flashing in day and White flashing or Red/Infrared flashing/steady in night mode. Incorporates the benefits of advanced LED, optical and system control technologies to meet the most demanding applications.



KEY FEATURES

- Designed for optimal corrosion resistance in offshore environments due to usage of best-in-class aluminium with "Excellent Resistance to Corrosion" classification and offshore proven coating system
- Optimised housing design minimizing the risk of coating damage during handling and installation
- Stainless steel mounting feet eliminating galvanic corrosion between feet and structure
- No maintenance required over service life.
- Orga optical design produces highly accurate and uniform narrow light beam
- Integrated design with build-in photocell and monitoring – no additional power supply enclosure needed.
- Integrated GPS based flash synchronization between lights, UTC 0.0.0.
- Low power consumption
- 15 year field proven power supply technology
- Made in the Netherlands

STANDARDS/CERTIFICATION

- Certified to ICAO Annex 14 Volume 1, Ninth Edition, July 2022, Chapter 6, Medium Intensity Type A / B / C obstacle light
- Certified to French "Arrêté du 23 avril 2018 relatif à la réalisation du balisage des obstacles à la navigation aérienne"
- Various national approvals available upon request

PERFORMANCE CHARACTERISTICS

- Horizontal beam pattern: 360°
- Vertical beam pattern: 3° minimum
- Intensity White light: See table
- Intensity Red light: See table
- Infra-Red wavelength ~850nm
- Infra-Red beam follows visible light, or beam is according to local standards

ELECTRICAL CHARACTERISTICS

- Operating voltage: 120-240Vac nominal 50-60Hz
- Power consumption: See table
- Overvoltage protection: Class III according to IEC61643-1

PHYSICAL CHARACTERISTICS

- Dimensions: L x W x H: See drawing
- Weight: 16kg
- Design degree of protection: IP65
- Operating temperature range: -40 °C/+55 °C
- Shipping information: 550 x 550 x 400 mm; approx. 20 kg
- Supplied with pre-mounted Orga cable for easy installation and high reliability ready for use
- Cable bending radius static: 7x cable diameter
- Outer cable diameter: Ø12.5 +/- 0.5 mm
- Cable weight: 260 g/m
- Level indicators for correct mounting

SYSTEM DESIGN, CONTROL AND MONITORING

- Use as a stand-alone light, or in a multiple light system with an Orga CIP controller
- Optional Orga CIP controller facilities provides control interfaces for:
 - "smart switch" aircraft detection input
 - Visibility condition variable intensity input
 - Visibility condition variable intensity input; intensity steps 30% and 10%
 - Remote photocell control input/override



L550-XXX-SE-G WHITE + RED + INFRARED

Medium intensity obstruction light


Product				Additional information			
Type	Light performance			Power consumption (W) @ 20 °C			Standard
	Day	Twilight	Night	Day	Twilight	Night	
L550-63A/63B-SE-G	20.000 cd White 20 fpm	20.000 cd White 20 fpm	2000 cd Red 20 fpm	25 W	25 W	12 W	ICAO
L550-63A/63B-IR-SE-G	20.000 cd White 20 fpm	20.000 cd White 20 fpm	2000 cd Red 20 fpm + IR	23 W	23 W	17 W	ICAO
L550-63A-SE-G	20.000 cd White 20 fpm	20.000 cd White 20 fpm	2000 cd White 20 fpm	25 W	25 W	13 W	ICAO
L550-63A/FR1-30/30-SE-G	20.000 cd White 30 fpm	20.000 cd White 30 fpm	2000 cd Red 30 fpm	34 W	34 W	17 W	STAC
L550-63A/FR2-30/30-SE-G	20.000 cd White 30 fpm	20.000 cd White 30 fpm	200 cd Red 30 fpm	25 W	25 W	7 W	STAC
L550-63A/63C-30/S-SE-G	20.000 cd White 30 fpm	20.000 cd White 30 fpm	2000 cd Red steady	34 W	34 W	27 W	ICAO




L550-XXX-SE-G WHITE + RED + INFRARED

Medium intensity obstruction light

FRONT VIEW

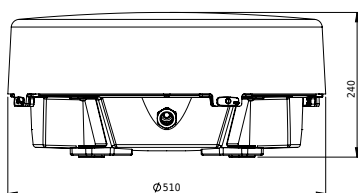

LEFT VIEW



BOTTOM VIEW

